



School and Food Pantry

Milk Cooler Inventory Report

April 2, 2020

Additional specs available upon request

Beverage Air Model No. SMF49HC-1-S



SMF49HC-1-S

\$3,353.76 +shipping

MODEL	SMF49HC-1-S	SMF49HC-1-W
EXTERNAL DIMENSIONAL DATA		
Width Overall	49"	49"
Depth Overall	33 5/8"	33 5/8"
Height Overall with Casters	47"	47"
Number of Lids/Doors	Single Access	Single Access
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	19.66	19.66
Internal Width Overall (in)	46"	46"
Internal Depth Overall (in)	30"	30"
Internal Height Overall (in)	24 7/8"	24 7/8"
CASE CAPACITIES		
13" x 13" x 11"	12	12
19" x 13" x 11"	8	8
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3.0	3.0
REFRIGERATION DATA		
Horsepower	1/4	1/4
Capacity BTU	1480	1480
WEIGHT DATA		
Gross Weight (Crated lbs)	437 lbs	437 lbs
Height - Crated	54"	54"
Width - Crated	54"	54"
Depth - Crated	38"	38"

Beverage Air Model No. SMF58HC-1-W



SMF58HC-1-W

\$3,427.03 +shipping

MODEL	SMF58HC-1-S	SMF58HC-1-W
EXTERNAL DIMENSIONAL DATA		
Width Overall	58"	58"
Depth Overall	33 5/8"	33 5/8"
Height Overall with Casters	47"	47"
Number of Lids/Doors	Single Access	Single Access
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	24	24
Internal Width Overall (in)	55"	55"
Internal Depth Overall (in)	30"	30"
Internal Height Overall (in)	24 7/8"	24 7/8"
CASE CAPACITIES		
13" x 13" x 11"	16	16
19" x 13" x 11"	10	10
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3.3	3.3
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity BTU	2052	2052
WEIGHT DATA		
Gross Weight (Crated lbs)	458 lbs	458 lbs
Height - Crated	54"	54"
Width - Crated	63"	63"
Depth - Crated	38"	38"

Beverage Air Model No. SMF34HC-1-W




SMF34HC-1-W

\$2,635.70 +shipping

MODEL	SMF34HC-1-S	SMF34HC-1-W
EXTERNAL DIMENSIONAL DATA		
Width Overall	34"	34"
Depth Overall	33 5/8"	33 5/8"
Height Overall with Casters	46 7/8"	46 7/8"
Number of Lids/Doors	Single Access	Single Access
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	13.59	13.59
Internal Width Overall (in)	31"	31"
Internal Depth Overall (in)	30"	30"
Internal Height Overall (in)	24 7/8"	24 7/8"
CASE CAPACITIES		
13" x 13" x 11"	8	8
19" x 13" x 11"	4	4
ELECTRICAL DATA		
Full Load Amperes 115/60/1	3	3
REFRIGERATION DATA		
Horsepower	1/6	1/6
Capacity BTU	1010	1010
WEIGHT DATA		
Gross Weight (Crated lbs)	328 lbs	328 lbs
Height - Crated	53 1/2"	53 1/2"
Width - Crated	39"	39"
Depth - Crated	38"	38"

Beverage Air Model No. SM58HC-W

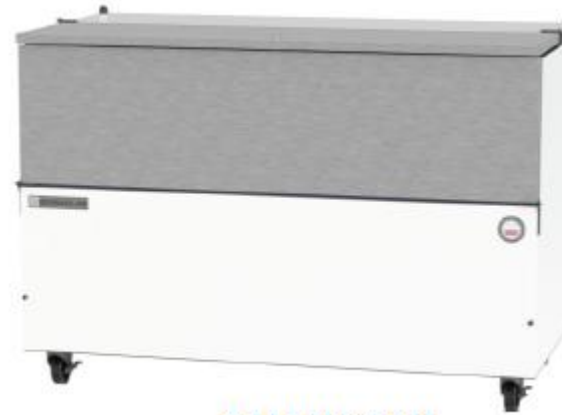

SM58HC-W

\$2,542.39 +shipping

MODEL	SM58HC-S	SM58HC-W
EXTERNAL DIMENSIONAL DATA		
Width Overall	58"	58"
Depth Overall	30 5/8"	30 5/8"
Height Overall with 4" Casters	41 1/8"	41 1/8"
Number of Lids/Doors	Single Access	Single Access
INTERNAL DIMENSIONAL DATA		
NET Capacity (cubic ft.)	22.63	22.63
Internal Width Overall (in)	55"	55"
Internal Depth Overall (in)	27"	27"
Internal Height Overall (in)	25 3/4"	25 3/4"
CASE CAPACITIES		
13" x 13" x 11"	16	16
19" x 13" x 11"	10	10
ELECTRICAL DATA		
Full Load Amperes 115/60/1	2.2	2.2
REFRIGERATION DATA		
Horsepower	1/3	1/3
Capacity BTU	1434	1434
WEIGHT DATA		
Gross Weight (Crated lbs)	376 lbs	376 lbs
Height - Crated	47"	47"
Width - Crated	61"	61"
Depth - Crated	34"	34"

Kelvinator Commercial Model No. KCMC58RW-HC



\$2,144.68 +shipping

Electric

Supply voltage:	738277 (KCHMC58)	115 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Current consumption:		2 Amps
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	23.5 cu.feet
-----------------	--------------

Key Information:

External dimensions, Width:	58 1/16" (1493 mm)
External dimensions, Depth:	30 9/16" (802 mm)
External dimensions, Height:	42 1/64" (1067 mm)
Internal Dimensions (depth):	25 13/16"
Internal Dimensions (height):	27 "
Internal Dimensions (width):	54 15/16"
Shipping height:	48 5/8" (1235 mm)
Shipping weight:	300 lbs (136 kg)
Shipping volume:	54.35 ft³ (1.54 m³)
Type of external material:	Prepainted white
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Refrigerant type:	R290
Refrigerant weight:	90 g
Operating temperature min.:	35.6 °F
Operating temperature max.:	37.4 °F
Condenser type:	Fin & tube

Kelvinator Commercial Model No. KCMC49RW-HC



\$1,336.08 +shipping

Electric

Supply voltage:	738125 (KCMC49RW-HC)	115 V/1 ph/60 Hz
Electrical power, max:		0.736 kW
Plug type:		USA NEMA 5-15P

Key Information:

Capacity (Cu.Ft.)	20
External dimensions, Width:	49 " (1244.6 mm)
External dimensions, Depth:	34 " (863.6 mm)
External dimensions, Height:	42 " (1066.8 mm)
Type of external material:	White Prepainted Steel
Type of internal material:	304 AISI
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5 1/3
Refrigerant type:	R290
Operating temperature min.:	33.01 °F
Operating temperature max.:	41 °F
Condenser type:	Fin & tube

Kelvinator Commercial Model No. KCHMC34



\$1,835.93 +shipping

Electric

Supply voltage:	738277 (KCHMC58)	115 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Current consumption:		2 Amps
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	23.5 cu.feet
-----------------	--------------

Key Information:

External dimensions, Width:	58 1/16" (1493 mm)
External dimensions, Depth:	30 9/16" (802 mm)
External dimensions, Height:	42 1/64" (1067 mm)
Internal Dimensions (depth):	25 13/16"
Internal Dimensions (height):	27 "
Internal Dimensions (width):	54 15/16"
Shipping height:	48 5/8" (1235 mm)
Shipping weight:	300 lbs (136 kg)
Shipping volume:	54.35 ft³ (1.54 m³)
Type of external material:	Prepainted white
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Refrigerant type:	R290
Refrigerant weight:	90 g
Operating temperature min.:	35.6 °F
Operating temperature max.:	37.4 °F
Condenser type:	Fin & tube

Kelvinator Commercial Model No. KCHMC58



\$2,144.68 +shipping

Electric

Supply voltage:	738277 (KCHMC58)	115 V/1 ph/60 Hz
Electrical power, max:		0.2 kW
Current consumption:		2 Amps
Plug type:		USA NEMA 5-15P

Capacity:

Gross capacity:	23.5 cu.feet
-----------------	--------------

Key Information:

External dimensions, Width:	58 1/16" (1493 mm)
External dimensions, Depth:	30 9/16" (802 mm)
External dimensions, Height:	42 1/64" (1067 mm)
Internal Dimensions (depth):	25 13/16"
Internal Dimensions (height):	27 "
Internal Dimensions (width):	54 15/16"
Shipping height:	48 5/8" (1235 mm)
Shipping weight:	300 lbs (136 kg)
Shipping volume:	54.35 ft³ (1.54 m³)
Type of external material:	Prepainted white
Type of internal material:	Stainless Steel
Warranty:	3 / 5 years

Refrigeration Data

Compressor Horsepower:	1/5
Refrigerant type:	R290
Refrigerant weight:	90 g
Operating temperature min.:	35.6 °F
Operating temperature max.:	37.4 °F
Condenser type:	Fin & tube